

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007264 A1

(51) International Patent Classification⁷: **B62D 51/02**,
51/00, B60G 17/015, A63C 17/12, A61G 5/04

(74) Agents: **SMOLENSKI, Alexander, J.** et al.; Bromberg
& Sunstein LLP, 125 Summer Street, Boston, MA 02110-
1618 (US).

(21) International Application Number:
PCT/US2003/021625

(22) International Filing Date: 11 July 2003 (11.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/395,589 12 July 2002 (12.07.2002) US

(71) Applicant: **DEKA PRODUCTS LIMITED PARTNER-
SHIP** [US/US]; 340 Commercial Street, Manchester, NH
03101 (US).

(72) Inventors: **KAMEN, Dean, L.**; 15 Westwind Road,
Bedford, NH 03110 (US). **AMBROGI, Robert, R.**; 141
Arah Street, Manchester, NH 03104 (US). **HEINZMANN,
Richard, Kurt**; P.O. Box 272, Franconstown, NH 03043
(US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: CONTROL OF A TRANSPORTER BASED ON ATTITUDE

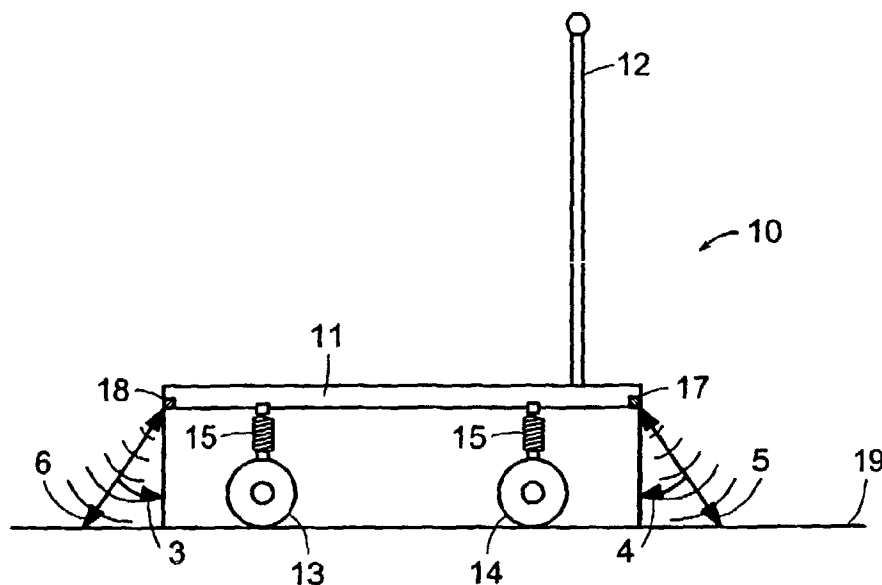

(57) Abstract: A transporter (1) for transporting a load over a surface. The transporter includes a support platform (11) for supporting the load. The support platform is characterized by a foreaft axis (x), a lateral axis (y), and an orientation with respect to the surface, the orientation referred to as an attitude. At least one ground-contacting element (14) is flexibly coupled to the support platform in such a manner that the attitude of the support platform is capable of variation. One or more ground contacting elements are driven by a motorized drive arrangement. A sensor module (17, 18) generates a signal characterizing the attitude of the support platform. Based on the attitude, a controller commands the motorized drive arrangement.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Control of a Transporter Based on Attitude

Technical Field

5 The present invention pertains to transporters and methods for transporting a load, which may be a living subject, and more particularly to controlling motion of a transporter.

Background Art

10 A wide range of vehicles having a motorized drive arrangement are known for conveying various subjects, either for purposive locomotion or for recreational purposes. The means used to command the motorized drive arrangement of these vehicles varies greatly. For example, an operator may manipulate an accelerator pedal to control forward motion of an automobile, while steering is typically performed using a steering wheel. Or
15 the motion of a sporting vehicle may be controlled by rocking a foot board upon which a user is balanced towards the front or rear to mechanically move a throttle cable, as described in U.S. patent no. 4,790, 548 (Francken). Based on the operator's physical attributes for example, or the transporter's intended functionality, alternative methods for controlling motion of a transporter may be desirable.

Summary of the Invention

20 In a first embodiment of the invention there is provided a transporter for transporting a load over a surface. The transporter includes a support platform for supporting the load. The support platform is characterized by a fore-aft axis, a lateral axis, and an orientation with respect to the surface, the orientation referred to as an
25 attitude. At least one ground-contacting element, which is driven by a motorized drive arrangement, is coupled to the support platform in such a manner that the attitude of the support platform is capable of variation. A sensor module generates a signal characterizing the attitude of the support platform. Based on the attitude, a controller commands the motorized drive arrangement.

In accordance with related embodiments of the invention, one or more ground-contacting elements may be flexibly coupled to the support platform in such a manner that the attitude of the support platform is capable of variation based on a position of a center of mass of the load relative to the at least one ground-contacting elements.

5 The sensor module may include at least one distance sensor for measuring a distance characteristic of the attitude of the platform. The distance sensor may be selected from the group of distance sensors consisting of an ultrasonic distance sensor, an acoustic distance sensor, a radar distance sensor, optical distance sensor, and a contact sensor, such as a whisker(s). The at least one distance sensor may sense the distance between a
10 fiducial point on the platform and a position on the surface disposed at a specified angle with respect to the support platform. In other embodiments, the transporter may include a first component that remains in a substantially fixed vertical position relative to the surface, wherein the at least one distance sensor senses the distance between a fiducial point on the platform and the first component. One or more ground contacting elements
15 may include a wheel having an axle, and the first component is fixed relative to the axle. Alternatively, and not meant to be limiting, one or more ground contacting elements may include a wheel supported by a frame, and the first component is fixed relative to the frame.

 In accordance with other related embodiments of the invention, the attitude of the
20 support platform is capable of variation based at least on a signal generated by a remote control device. The transporter may include a powered strut coupled to the platform, the powered strut capable of varying the attitude of the support platform based at least on the signal generated by the remote control device. The transporter may further include a user interface, wherein the attitude of the support platform is capable of variation based on a
25 signal generated by the user interface. The controller may command motion of the transporter in the fore-aft plane and/or the lateral plane.

 In accordance with another embodiment of the invention, a method for controlling a transporter having a support platform for supporting a load is presented. The support platform is characterized by an attitude with respect to the surface. The transporter
30 includes at least one ground contacting elements flexibly coupled to the support platform in such a manner that the attitude of the platform is capable of variation. The transporter also includes a motorized drive arrangement for driving the at least one ground contacting element. The method includes generating a signal characterizing an attitude of the

support platform. The motorized drive arrangement is commanded based at least on the attitude.

Brief Description of the Drawings

The foregoing features of the invention will be more readily understood by
5 reference to the following detailed description, taken with reference to the accompanying drawings, in which:

Fig. 1 depicts one embodiment of a human transporter, lacking a distinct user input device, to which the present invention may advantageously be applied;

Fig. 2 is a side view of a transporter, in accordance with one embodiment of the
10 invention;

Fig. 3 is an expanded side view of a transporter, in accordance with one embodiment of the invention;

Fig. 4 is a side view of a transporter, in accordance with one embodiment of the invention; and

15 Fig. 5 is a block diagram of a controller of a transporter, in accordance with one embodiment of the invention.

Detailed Description of Specific Embodiments

In accordance with one embodiment of the invention, Fig. 1 shows a transporter, 1
20 lacking a distinct input device, to which the present invention may advantageously be applied. Transporter 1 is described in detail in U.S. patent number 6,302,230, which is incorporated herein by reference in its entirety. Transporter 1 includes a support platform 11 for supporting a load, which may be a living subject 9, over the ground or other surface, such as a floor, which may be referred to herein generally as "ground". A
25 subject, for example, may stand or sit on support platform 11. Attached to support platform 11 may be a handlebar 12 that can be gripped when riding transporter 1.

One or more ground-contacting elements 2, 7 provide contact between support platform 11 and the ground. Ground-contacting elements 2, 7 may include, but are not limited to, arcuate members, tracks, treads, and wheels (hereinafter the term "wheel" will
30 be used in the specification to refer to any such ground-contacting element without limitation). While the transporter 1 depicted in Fig. 1 lacks stability in its operating position unless subject to controlled balancing, the application of the present invention is

specifically not limited to transporters of that sort and embodiments of the present invention may advantageously be applied to statically stable transporters as well.

Support platform 11 may be flexibly coupled to the wheels 2, 7 by various means known in the art, for example, a pivot mechanism, springs, or pneumatic pistons. In other
5 embodiments, the wheels 2, 7 may have some compliance and serve the function of a spring. For purposes of the present description, platform 11 may be characterized by a fore-aft axis, a lateral axis, and an orientation with respect to the surface, which is referred to herein as an attitude. The fore-aft axis, X-X, is perpendicular to the wheel
10 axis, while the lateral axis, Y-Y, is parallel to the axis of the wheels. Directions parallel to the axes X-X and Y-Y are called the fore-aft and lateral directions respectively.

Referring now to fig. 2, which shows a transporter 10 in accordance with one embodiment of the invention, the attitude of support platform 11 may, for example, be capable of variation based on a position of a center of mass of the load relative to one or more wheels 13, 14. Alternatively, transporter 10 may include a power strut or other
15 mechanism capable of altering the attitude of the support platform 11. The power strut may be controlled by a user interface located on transporter 10, such as a joystick or a rotatable potentiometer located on handlebar 12. In other embodiments, the power strut may also be controlled by a remote control device, such as, but not limited to, an infrared or radio controlled remote control device.

20 The motion of transporter 10 is based, at least in part, on the attitude of the support platform 11. To determine the attitude of the support platform 11, transporter 10 includes a sensor module. Sensor module may include at least one distance sensor 17, 18 for measuring a distance characteristic of the attitude of the support platform 11. The distance measured may be, for example, the distance between a fiducial point on the
25 support platform 11 and a surface 19, or alternatively, another component on transporter 10. A plurality of distances measured by the sensor module may be combined to generate at least one signal characteristic of the platform attitude.

Attitude/distance sensor may be one of many sensor types, such as, for example, an ultrasonic, optical, acoustic or radar sensor wherein a signal generated by a source is
30 reflected back by a surface to a sensor receiver. The distance from the sensor to the surface can then be calculated based on the time (or phase) difference between when the signal was generated and when the reflected signal was received. Triangulation may be performed. In other embodiments, distance sensor can be a contact sensor(s) such as, without limitation, a whisker(s). For example, a plurality of whiskers, each having a

predetermined length may be utilized, with distance determined based on which whisker bends or is otherwise activated when making contact with the surface. A single whisker may be utilized with distance determined based, at least on part, on the bending angle of the whisker.

5 Referring to Fig. 2, distance sensors 17, 18 sense the distance between a fiducial point on the platform and a position on the surface that is disposed at a specified angle 3, 4, with respect to the support platform. First distance sensor 17 is located at the front (fore) of platform 11 and senses a first distance 5 between platform 11 and surface 19. Second distance sensor 17 is located at the back (aft) of platform 11 and senses a second
10 distance 6 between platform 11 and surface 19. By comparing distances 5 and 6, a signal indicative of an attitude of the platform 11, and more specifically, the inclination of the platform 11 in the fore-aft plane with respect to the surface 19, can be determined.

 In another embodiment, at least one distance sensor 22 may sense the distance between a fiducial point on the transporter platform 11 and a first component 23 that
15 remains in a substantially fixed vertical position relative to the surface 19, as shown in the expanded view of a transporter in Fig. 3. First component 23 may be, for example, a wheel axle 23 or a frame used to support the at least one wheel 14. In various embodiments, first component 23 may include a reflector for reflecting the signal generated by distance sensor 22.

20 Fig. 4 shows a transporter 60 that includes a first support platform 69 and a second support platform 61, in accordance with one embodiment of the invention. At least one wheel 63 and 64 provides contact between the first support platform 69 and the ground. Second support platform 61 is coupled to the first support platform 69 such that the second support platform 61 can tilt in the fore-aft plane based, for example, on a
25 position of a center of mass of the loaded second support platform 61. Second support platform 61 may be tiltably attached to the first support platform 69 using, without limitation, springs 65 and 66 and/or a pivot mechanism 68. Similar to above-described embodiments, based on the tilting of the second support platform 61, at least one sensor 67 and 70 generates a signal indicative of the attitude of the second support platform 61.
30 Attached to the first support platform 69 or second support platform 61 may be a handlebar 62 that can be gripped while operating the transporter 60.

 A controller receives the signal characteristic of the attitude from the sensor module. Based at least on this signal, the controller implements a control algorithm to command a motorized drive arrangement so as to drive the at least one wheel. The

controller may also respond to commands from other operator interfaces, such as a joystick or dial attached, for example, to handlebar.

Fig. 5 shows a controller 30 for controlling the motorized drive of the transporter, in accordance with one embodiment of the invention. Controller 30 receives an input characteristic of platform attitude from sensor module 34. Based at least on the input from the sensor module, controller 30 commands at least one motorized drive 35, 36. Controller 30 also interfaces with a user interface 31 and a wheel rotation sensor 33. User interface 31 may include, among other things, controls for turning the controller 30 on or off. When the controller 30 is turned off, the at least one wheel of the transporter may be free to move, such that the transporter acts as a typical push scooter. User interface 31 may also control a locking mechanism 32 for locking the at least one wheel.

The controller 30 includes a control algorithm to determine the amount of torque to be applied to the at least one wheel based on the sensed attitude of the support platform. The control algorithm may be configured either in design of the system or in real time, on the basis of current operating mode and operating conditions as well as preferences of the user. Controller may implement the control algorithm by using a control loop. The operation of control loops is well known in the art of electromechanical engineering and is outlined, for example, in Fraser & Milne, *Electro-Mechanical Engineering*, IEEE Press (1994), particularly in Chapter 11, "Principles of Continuous Control" which is incorporated herein by reference.

As an example, and not meant to be limiting, the control algorithm may take the form:

$$\text{Torque Command to Wheel} = K [\theta + O]$$

where K = gain,

θ = support platform attitude, and

O = offset.

The support platform attitude, θ , may be in the form of an error term defined as the desired support platform attitude minus the measured support platform attitude. The gain, K , may be a predetermined constant, or may be entered/adjusted by the operator through user interface 31. Responsiveness of the transporter to attitude changes can be governed by K . For example, if K is increased, a rider will perceive a stiffer response in that a small change in platform attitude will result in a large torque command. Offset, O , may be incorporated into the control algorithm to govern the torque applied to the motorized drive, either in addition to, or separate from, the direct effect of θ . Thus, for

example, the user may provide an input by means of a user interface of any sort, the input being treated by the control system equivalently to a change, for example, in platform attitude.

Thus, referring back to fig. 2, motion of the transporter 10 may be controlled by a subject changing the attitude of the platform 11. This change in attitude is reflected by distances 5, 6 sensed by the sensor module. Depending on the control algorithm, an initial change in attitude, such that first distance 5 is less than second distance 6, may result in positive torque being applied to one or more wheels 23, 24, causing the wheels 23, 24 to move forward. Likewise, an initial change in the attitude, such that first distance 5 is greater than second distance 6 may result in a negative torque applied to one or more wheels 23, 24, causing the wheels 23, 24 to move in the aft direction. If the subject then remains in his changed position on the platform such that the platform attitude remains the same, the motor will continue to torque at approximately the same rate.

In various embodiments of the invention, the sensor module may sense changes in platform attitude in addition to, or instead of inclination of support platform in the fore-aft plane. For example, sensor module may provide an attitude signal indicative of inclination of the support platform in the lateral plane relative to the surface. This may be accomplished by the use of two laterally disposed distance sensors. Changes in the angle of inclination of the support platform in the lateral plane can then be used either separately or in combination with other attitude changes to control motion of the transporter. For example, changes in the angle of inclination in the fore-aft plane can be used to control fore-aft motion, while changes in the angle of inclination in the lateral plane can be used to control steering of the transporter.

Steering may be accomplished, in an embodiment having at least two laterally disposed wheels (i.e., a left and and right wheel), by providing separate motors for left and right wheels. Torque desired for the left motor and the torque desired from the right motor can be calculated separately. Additionally, tracking both the left wheel motion and the right wheel motion permits adjustments to be made, as known to persons of ordinary skill in the control arts, to prevent unwanted turning of the vehicle and to account for performance variations between the two motors.

The described embodiments of the invention are intended to be merely exemplary and numerous variations and modifications will be apparent to those skilled in the art. All

such variations and modifications are intended to be within the scope of the present invention as defined in the appended claims.

What is claimed is:

1. A transporter for transporting a load over a surface, the transporter comprising:
 - a support platform for supporting the load, the support platform characterized by a fore-aft axis, a lateral axis, and an orientation with respect to the surface, the orientation referred to as an attitude;
 - at least one ground-contacting element coupled to the support platform in such a manner that the attitude of the support platform is capable of variation;
 - a motorized drive arrangement for driving the at least one ground-contacting elements;
 - a sensor module for generating a signal characterizing the attitude of the support platform; and
 - a controller for commanding the motorized drive arrangement based at least on the attitude of the support platform.
2. The transporter according to claim 1, wherein one or more ground-contacting elements are flexibly coupled to the support platform in such a manner that the attitude of the support platform is capable of variation based on a position of a center of mass of the load relative to the at least one ground-contacting element.
3. The transporter according to claim 1, wherein the sensor module includes at least one distance sensor for measuring a distance characteristic of the attitude of the platform.
4. The transporter according to claim 3, wherein the at least one distance sensor senses the distance between a fiducial point on the platform and a position on the surface disposed at a specified angle with respect to the support platform.
5. The transporter according to claim 3, further including a first component that remains in a substantially fixed vertical position relative to the surface, wherein the at least one distance sensor senses the distance between a fiducial point on the platform and the first component.
6. The transporter according to claim 5, wherein one or more ground contacting elements include a wheel having an axle, and the first component is fixed relative to the axle.
7. The transporter according to claim 5, wherein one or more ground contacting elements include a wheel supported by a frame, and the first component is fixed relative to the frame.

8. The transporter according to claim 2, wherein the distance sensor is selected from the group of distance sensors consisting of an ultrasonic distance sensor, an acoustic distance sensor, a radar distance sensor, a contact sensor, and an optical distance sensor.
- 5 9. The transporter according to claim 1, wherein the attitude of the support platform is capable of variation based at least on a signal generated by a remote control device.
10. The transporter according to claim 9, further including a powered strut coupled to the platform, the powered strut capable of varying the attitude of the support platform based
10 at least on the signal generated by the remote control device.
11. The transporter according to claim 1, further comprising a user interface, wherein the attitude of the support platform is capable of variation based on a signal generated by the user interface.
- 15 12. The transporter according to claim 1, wherein the controller commands motion in the fore-aft plane.
13. The transporter according to claim 1, wherein the controller commands motion in the
20 lateral plane.
14. A method for controlling a transporter having a support platform for supporting a load, the support platform characterized by an attitude with respect to the surface, the transporter including at least one ground contacting elements flexibly coupled to the
25 support platform in such a manner that the attitude of the platform is capable of variation, the transporter further including a motorized drive arrangement for driving the at least one ground contacting element, the method comprising:
generating a signal characterizing an attitude of the support platform; and
commanding the motorized drive arrangement based at least on the attitude.
- 30 15. A method according to claim 14, wherein generating the signal includes measuring a distance characteristic of the attitude of the platform.
16. A method according to claim 15, wherein generating the signal includes measuring a
35 distance between a fiducial point on the platform and a position on the surface disposed at a specified angle.

17. A method according to claim 15, wherein generating the signal includes measuring the distance between a fiducial point on the platform and a component on the transporter that remains in a substantially fixed position relative to the surface.
- 5 18. A method according to claim 14, further comprising altering the attitude of the support platform by changing a position of a center-of-mass of the load relative to the at least one ground contacting element.
- 10 19. A method according to claim 14, further comprising altering the attitude of the support platform based at least on a signal generated by a user interface of the transporter.
20. A method according to claim 14, further comprising altering the attitude of the support platform based at least on a signal generated by a remote control device.

15

1/4

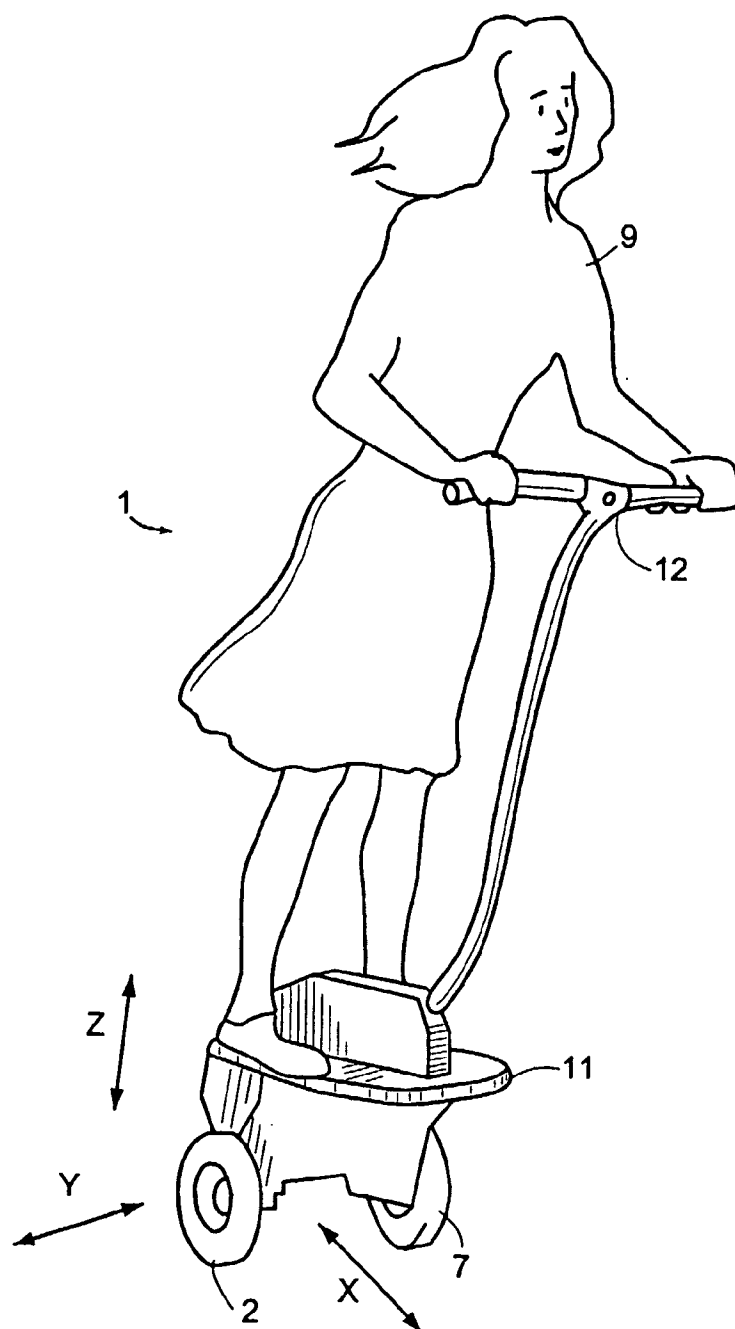


FIG. 1

2/4

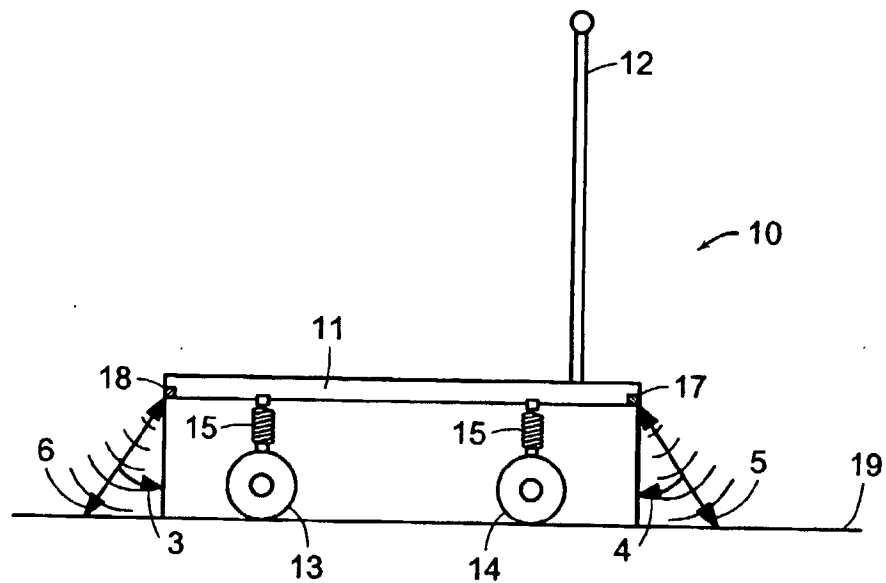


FIG. 2

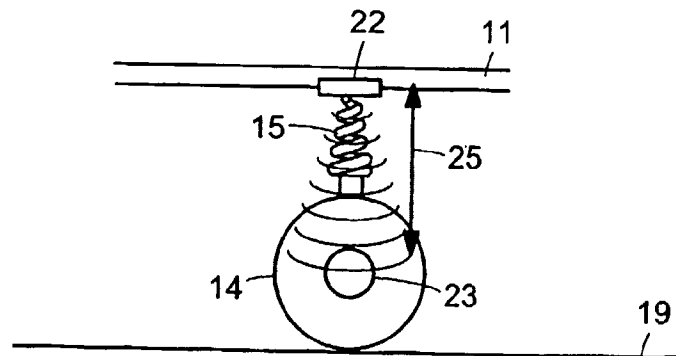


FIG. 3

3/4

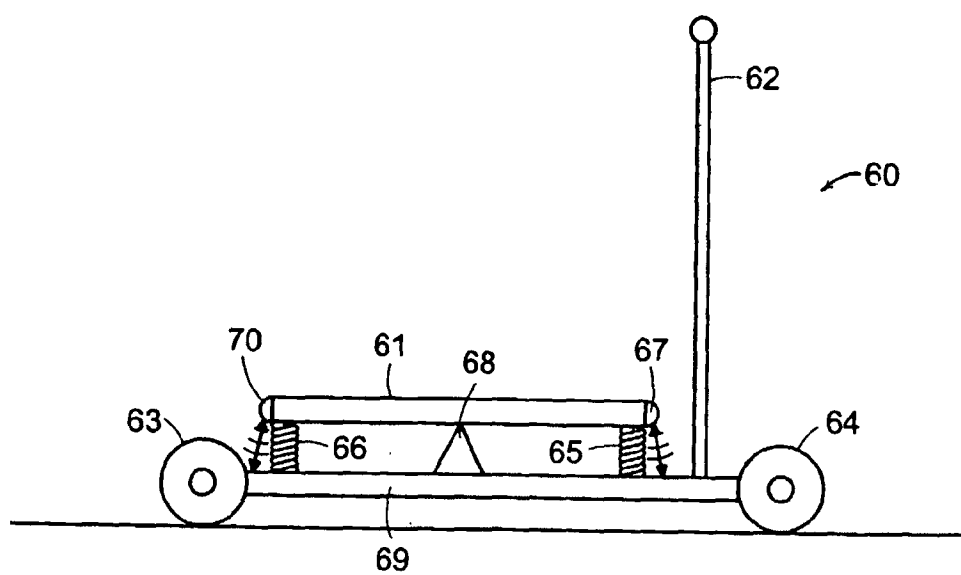


FIG. 4

4/4

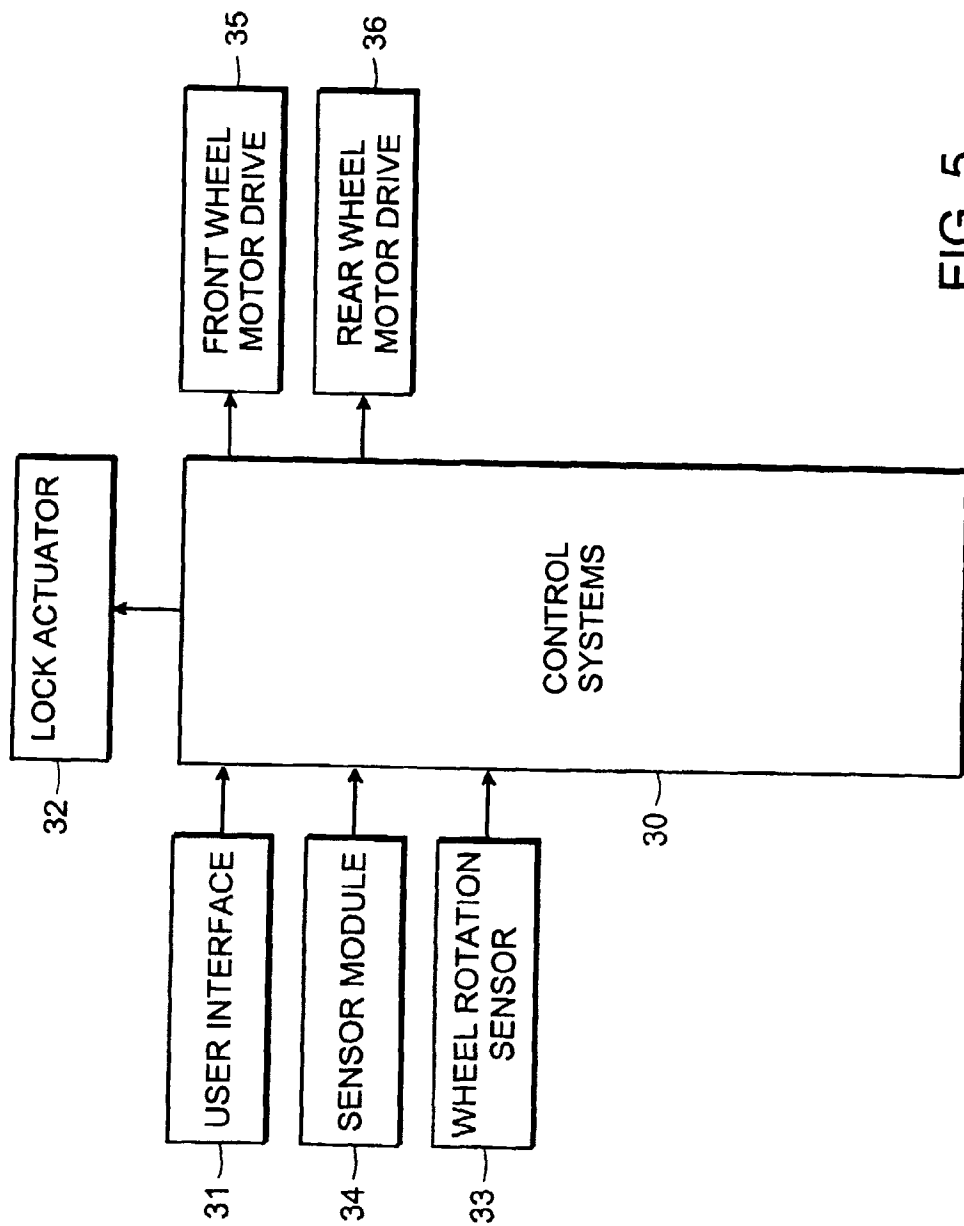


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/21625

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B62D51/02 B62D51/00 B60G17/015 A63C17/12 A61G5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A63C B62D B60G A61G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 75001 A (DEKA PRODUCTS LP) 14 December 2000 (2000-12-14) page 18, line 29 -page 19, line 16; figure 6 & US 6 302 230 A (DEKA PRODUCTS LP) 16 October 2001 (2001-10-16) cited in the application	1,2, 11-14, 18,19
Y	---	8
Y	EP 0 551 986 A (STANLEY ELECTRIC CO LTD ;BRIDGESTONE CORP (JP)) 21 July 1993 (1993-07-21) abstract; figures --- -/--	8



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

12 November 2003

Date of mailing of the international search report

26/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hageman, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/21625

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 05, 30 April 1998 (1998-04-30) & JP 10 023613 A (YAMAHA MOTOR CO LTD), 23 January 1998 (1998-01-23) abstract ---	3
A	US 5 696 515 A (RODDEWIG ROBBIN EDWIN ET AL) 9 December 1997 (1997-12-09) abstract; figures ---	8
A	US 5 899 284 A (REIMERS ERIC W ET AL) 4 May 1999 (1999-05-04) page 11, line 5 - line 20; figures 8,9 ---	9
A	DE 44 08 775 A (CROWN GABELSTAPLER GMBH) 21 September 1995 (1995-09-21) abstract; figures ---	10
A	US 6 050 357 A (LANG JEFFREY H ET AL) 18 April 2000 (2000-04-18) column 5, line 37 -column 6, line 12; figures -----	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/21625

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0075001	A	14-12-2000	US 6302230 B1	16-10-2001
			AU 5313700 A	28-12-2000
			CA 2375645 A1	14-12-2000
			EP 1181187 A1	27-02-2002
			JP 2003502002 T	14-01-2003
			WO 0075001 A1	14-12-2000
			US 2002063006 A1	30-05-2002
			US 6367817 B1	09-04-2002
EP 0551986	A	21-07-1993	JP 3187496 B2	11-07-2001
			JP 6201331 A	19-07-1994
			DE 69309117 D1	30-04-1997
			DE 69309117 T2	03-07-1997
			EP 0551986 A1	21-07-1993
			US 5337137 A	09-08-1994
JP 10023613	A	23-01-1998	NONE	
US 5696515	A	09-12-1997	NONE	
US 5899284	A	04-05-1999	US 5749424 A	12-05-1998
DE 4408775	A	21-09-1995	DE 4408775 A1	21-09-1995
US 6050357	A	18-04-2000	NONE	